

# UNICOTE® LUX GARAGE DOORS




Flatline sectional garage door in Silver Quartz


The UniCote® LUX garage doors are made from an imported pre-painted steel product designed to suit Australian high-end architecture. Combining the world's best coil coating technology with rigorous testing to Australian standards, it meets all weather conditions, resistant to chipping, peeling or cracking.

They are available in three sectional door profiles and 15 colours:


## Profile Options

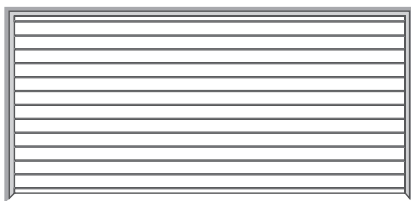

Slimline

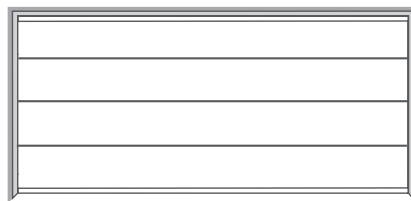

Flatline

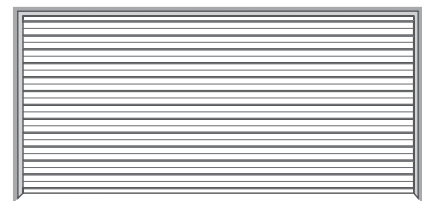

Glacier



[dynamicds.com.au](http://dynamicds.com.au)  
1300 645 056

**UniCote® LUX**

# UniCote® LUX Colour Options

## Architectural Series




Silver Quartz



Pentagon



Metal Stone



Dark Metal Stone



Zinc Graphite



Weathered Iron



Spectrum




Saffiano

## Timbers of the World Series




Brazilian Walnut




Ashwood



Gympie Messmate \*



Red oak \*



Kapur \*



African Blackwood

### NOTES:

- **The colours and patterns shown are provided as a guide only. Whilst we endeavour to get as close as possible, the limitations of printing processes make extremely accurate matches impossible. We strongly recommend comparing your choice with actual samples and discussing with your product consultant. Additionally, Dynamic Door Service reserves the right to vary or delete colours without notice.**
- Ashwood has a smooth finish whilst other "Timbers of the World" series have a slightly textured finish. Please see the product samples.
- For the UniCote® Lux testing information, please see the Unicote Lux brochure or visit [dynamicds.com.au/unicote-lux-garage-doors/](http://dynamicds.com.au/unicote-lux-garage-doors/)

## Why choose UniCote® LUX finish?

- **SCRATCH RESISTANCE**  
Good scratch resistance. Testing includes needle scratch test - no marking of paint surface when a needle with a 2kg weight attached is drawn across.
- **IMPACT RESISTANCE**  
No loss of paint adhesion after a test piece is struck on the reverse side with a specified force.
- **BEND RESISTANCE**  
No loss of adhesion or paint cracking when bent around a diameter equal to five times the thickness of the steel sheet.
- **HEAT RESISTANCE**  
Suitable for continuous service up to 100°C. Continuous service at higher temperatures may cause some colour change and damage to the paint film.
- **SALT RESISTANCE**  
Meets the requirements of AS/NZS2728:2013.
- **HUMIDITY RESISTANCE**  
Meets the requirements of AS/NZS2728:2013.
- **UV RESISTANCE**  
Meets the requirements of AS/NZS2728:2013.
- **VISUAL APPEARANCE**  
Made from a luxury material to suit high-end architecture.

**DYNAMIC™**  
**DOOR SERVICE**

[dynamicds.com.au](http://dynamicds.com.au) | 1300 645 056